



Web [www.bradleycollection.com](http://www.bradleycollection.com)

Email [info@bradleycollection.com](mailto:info@bradleycollection.com)

Follow us on



#### World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

#### USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA

Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.  
Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

the**bradley**collection

EDITION FIVE

STAINLESS



Pictured - ø50mm (2") Pole · Stud · Brushed Stainless Steel  
Interior design by CMI Interiors - New Jersey.

## STAINLESS

The modernist stainless collection is a perfect example of form following function. the design language is pure and simple, with sharp linear forms resulting from the machining process.

The brushed and mirrored surface finishes, combined with subtle tinting technology emphasise the innate qualities of the high grade stainless steel used throughout.





# REFINED AND RESILIENT

High grade stainless steel in this collection works for wet rooms, coastal settings and outdoors.

Pictured - ø25mm (1") Pole • Stud • Brushed Stainless Steel





Pictured - ø25mm (1") Pole • Large Disc  
Brushed Stainless Steel

## IN DETAIL

Pole diameters - ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")

- Unlimited system length ◊
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings in stainless steel on all diameters
- Passing system
- Bespoke bending and curving service
- Can be specified for wet room/outdoor use



Ceiling brackets



Passing system



Drapery arm  
See page 78



Double brackets




Custom bending

◊ Supplied in sections - Maximum section per length 2.4m (94")

# FINISHES

the renowned qualities of authentic stainless steel are emphasised by either a brushed or polished surface treatment, while a unique tinting process brings exciting new opportunities for modern design schemes.

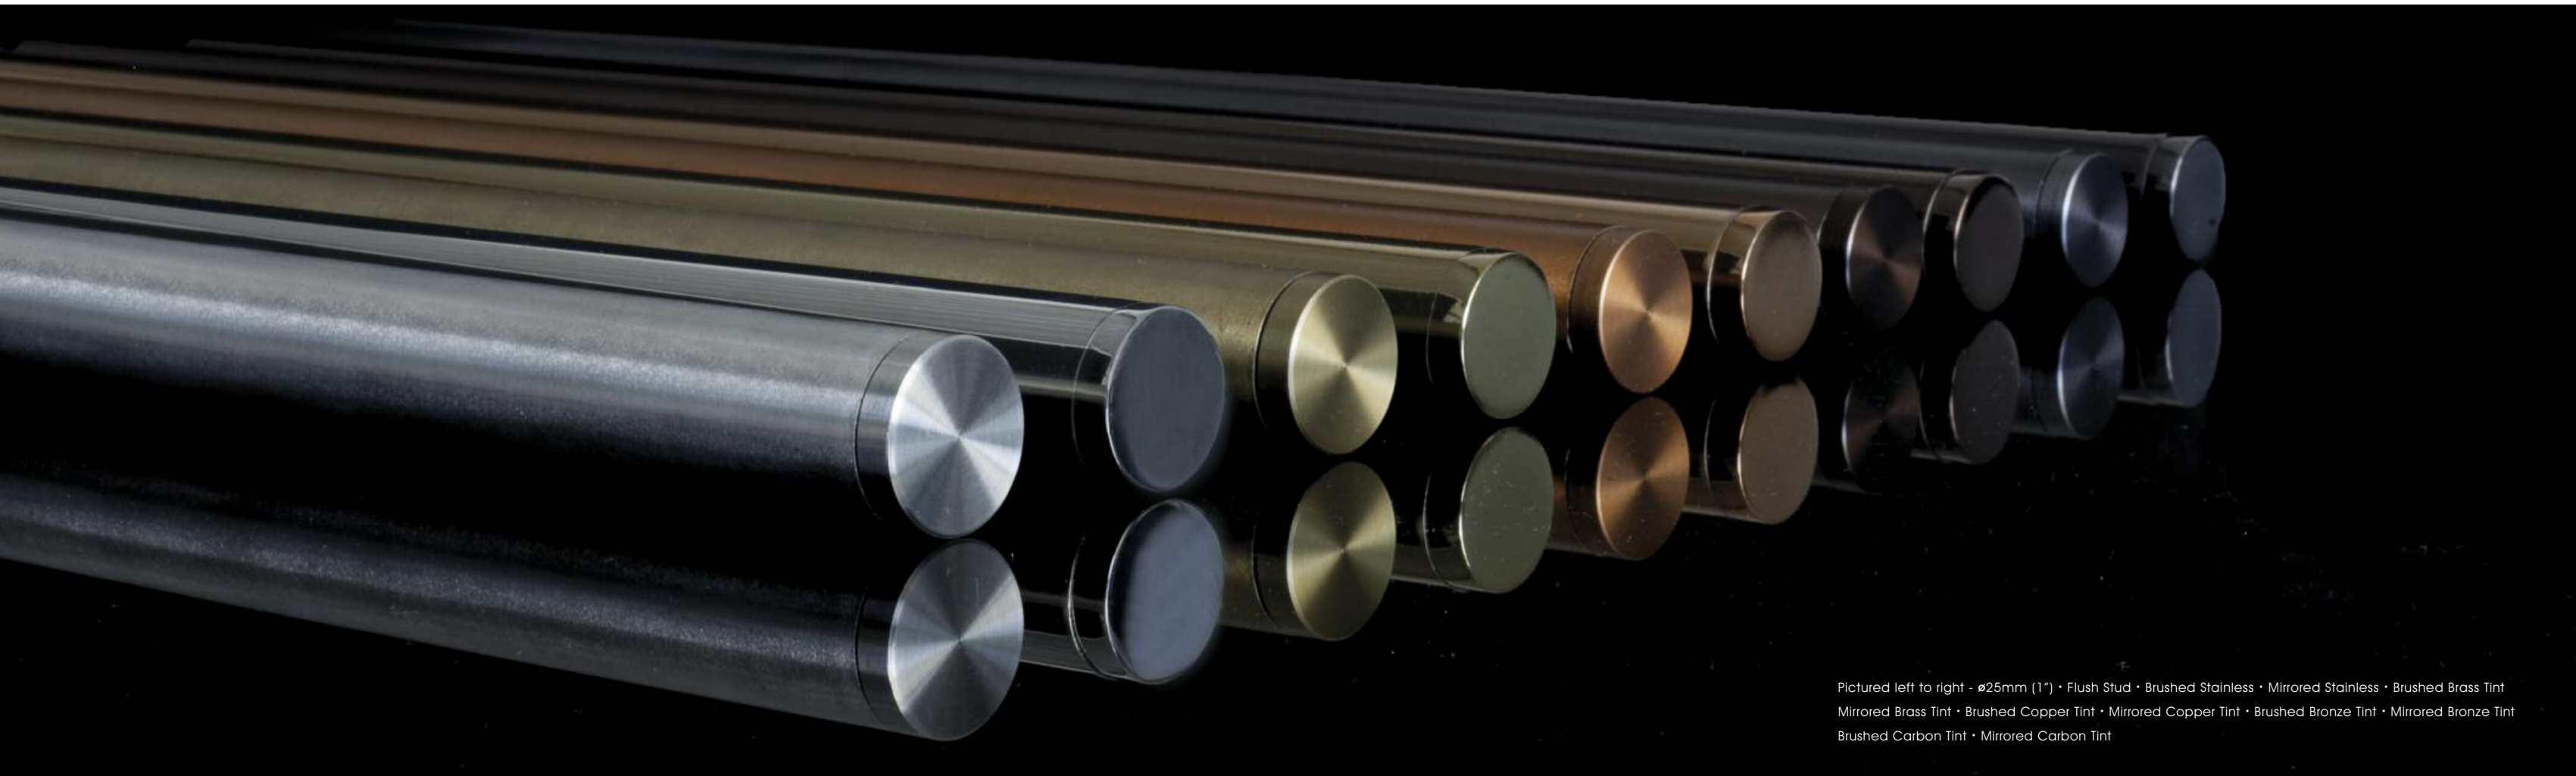

Pictured left to right -  $\varnothing$ 25mm (1") • Flush Stud • Brushed Stainless • Mirrored Stainless • Brushed Brass Tint • Mirrored Brass Tint • Brushed Copper Tint • Mirrored Copper Tint • Brushed Bronze Tint • Mirrored Bronze Tint • Brushed Carbon Tint • Mirrored Carbon Tint



Brushed Stainless



Brushed Brass Tint<sup>Ⓢ</sup>



Brushed Copper Tint<sup>Ⓢ</sup>



Brushed Bronze Tint<sup>Ⓢ</sup>



Brushed Carbon Tint<sup>Ⓢ</sup>



Mirrored Stainless<sup>Ⓢ</sup>



Mirrored Brass Tint<sup>Ⓢ</sup>



Mirrored Copper Tint<sup>Ⓢ</sup>



Mirrored Bronze Tint<sup>Ⓢ</sup>



Mirrored Carbon Tint<sup>Ⓢ</sup>

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

Ⓢ Longer lead-times will apply



# FINIALS

Modern, linear forms presented in brushed and mirrored finishes.



Pictured left to right - ø50mm (2") • Ball • Brushed Carbon Tint • Large Disc • Brushed Bronze Tint  
Crystal Ball • Mirrored Stainless • Flush Stud • Mirrored Copper Tint • Element • Mirrored Brass Tint  
Stud • Brushed Stainless • Cut Crystal Ball • Brushed Copper Tint • Disc • Brushed Brass Tint



## Flush Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 6mm (1/4")
- ø38mm (1 1/2") Inclusive Length 8mm (5/16")
- ø50mm (2") Inclusive Length 8mm (5/16")



## Stud

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (3/8")
- ø38mm (1 1/2") Inclusive Length 3mm (3/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



## Disc

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (3/8")
- ø38mm (1 1/2") Inclusive Length 3mm (3/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



## Large Disc

- ø19mm (3/4") Inclusive Length 4mm (3/16")
- ø25mm (1") Inclusive Length 4mm (3/16")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")



## Ball

- ø19mm (3/4") Inclusive Length 50mm (2")
- ø25mm (1") Inclusive Length 63mm (2 1/2")
- ø38mm (1 1/2") Inclusive Length 83mm (3 1/4")
- ø50mm (2") Inclusive Length 104mm (4 1/16")



## Crystal Ball<sup>⊕</sup>

- ø19mm (3/4") Inclusive Length 55mm (3 3/16")
- ø25mm (1") Inclusive Length 66mm (2 5/8")
- ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
- ø50mm (2") Inclusive Length 108mm (4 1/4")



## Cut Crystal Ball<sup>⊕</sup>

- ø19mm (3/4") Inclusive Length 55mm (3 3/16")
- ø25mm (1") Inclusive Length 66mm (2 5/8")
- ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
- ø50mm (2") Inclusive Length 108mm (4 1/4")



## Crystal Element<sup>⊕</sup>

- ø50mm (2") Inclusive Length 126mm (4 15/16")

⊕ Crystal Finials should not be positioned in direct sunlight  
For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## BRACKETS

## Single Brackets

<b>Side</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (3 3/4") w34mm (1 5/16") x h70mm (3 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
<b>Mid</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
<b>Passing</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
<b>Recess with ring stop</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Depth off wall</b> 7mm (1/4") 8mm (5/16") 12mm (1/2") 15mm (9/16")	<b>Fixing plate size</b> ø26mm (1") ø34mm (1 5/16") ø49mm (1 15/16") ø64mm (2 1/2")

## Ceiling Brackets

<b>Ceiling</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Drop from ceiling to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
<b>Passing</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Drop from ceiling to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")

## Double Brackets

<b>Side</b>	<b>Diameter</b> Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (3 3/4") w52mm (2 1/8") x h104mm (4 1/8")
<b>Mid</b>	<b>Diameter</b> Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8")
<b>Passing</b>	<b>Diameter</b> Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w72mm (2 13/16") x h59mm (2 5/16") w52mm (2 1/8") x h104mm (4 1/8")

## Adjustable Brackets


<b>Side</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (3 3/4") w34mm (1 5/16") x h70mm (3 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
<b>Passing</b>	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (3 3/4") w34mm (1 5/16") x h70mm (3 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")


Drapery Arm Drapery arms have been designed to work at dormer windows, doorways & above beds

<b>Diameter</b> ø25mm (1")	<b>Fixing plate size</b> w34mm (1 5/16") x h156mm (6 1/8")
-------------------------------	---

# RINGS, POLES & ACCESSORIES

## Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")


Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")



## Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 2.4m (96"). Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

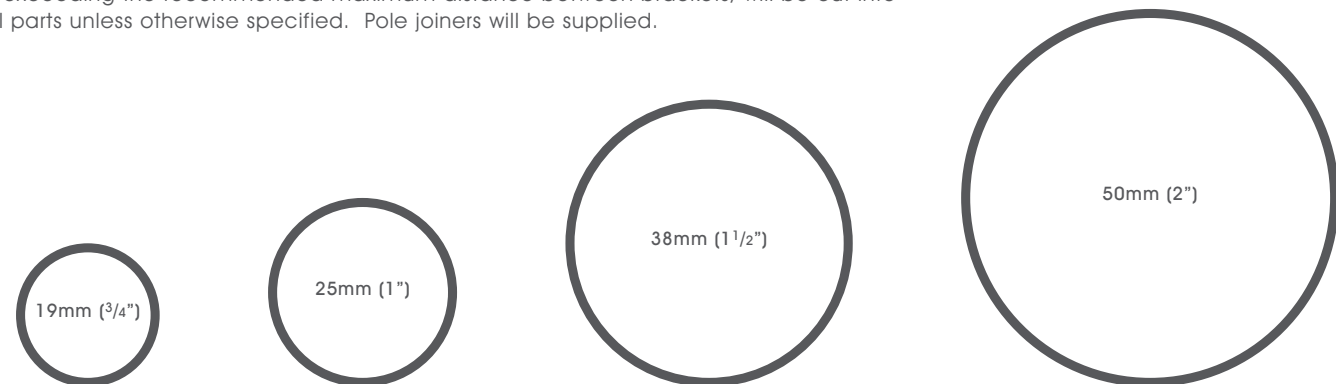

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R150mm (6")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R200mm (8")

## Ombres

### Small



Internal projection from wall: 150mm (5 7/8")  
Fixing plate size: ø19mm (3/4")

### Large



Internal projection from wall: 150mm (5 7/8")  
Fixing plate size: ø25mm (1")

## Hold back



Internal measurement: 137mm (5 3/8")  
Fixing plate size: ø44mm (1 3/4")

## Tie Back Hook



Projection: 29mm (1 1/8")  
Fixing plate size: w25mm (1") x h74mm (2 15/16")

## Draw Rods

### Fine



Draw rod length: 1000mm (39 3/8")

### Standard



Custom lengths available to order